

# Imray Correction Notice IC2800-3

17 April 2024

## Chart 2800 WGS 84

*Edition 2021*

*Versions available:*

*New Edition (corrected to November 2021)*

### NOTES

*Below is a complete list of corrections issued since the 2021 edition of this chart was published.*

*Each correction is issued with an ILNW reference number and year.*

*Corrections are listed chronologically in ascending order.*

#### 1 Loch Creran (2800.15 Main chart & Plan A)

Insert depth:

3.3m in 56°31'·79N 5°19'·38W. Del depth 5.2m close SE (Main chart)

3.2m in 56°33'·10N 5°16'·15W (Plan A) (ILNW 144/22)

#### 2 Campbeltown Loch (2800.2 Plan A)

Insert depth:

0.8m in 55°25'·88N 5°33'·60W

Replace depth:

2.6m with 2.1m in 55°24'·91N 5°35'·04W

2.5m with 1.7m in 55°26'·32N 5°33'·03W. Extend 2m contour E to enclose

Delete *obstn* 8.5m in 55°25'·59N 5°35'·64W (ILNW 177/22)

#### 3 Tidal streams around the north of Jura (*certain copies*)

Insert block correction tidal stream diagram around Jura 2H Before HW Dover replacing the duplicate 1H Before HW Dover diagram (ILNW 184/22)

#### 4 Loch Creran (2800.15)

Insert Lt Fl(2)G.6s2M at end of pontoon in 56°31'·27N 5°23'·88W (ILNW 243/22)

#### 5 Loch Eatharna (Arinagour) (2800.20 Plan A)

Insert Y special Bn in 56°37'·31N 6°31'·40W (ILNW 362/22)

#### 6 Port Ellen (2800.3 Plan A)

Insert depth:

1.7m in 55°37'·82N 6°12'·44W. Del 2.2m close NE

0.8m in 55°37'·84N 6°11'·56W. Del 1.5m close NE

2.1m in 55°37'·75N 6°11'·79W (ILNW 485/22)

#### 7 Coll E (2800.1, 2800.19 & 2800.20)

Delete Y spar Lt buoy Fl(5)Y.20s in 56°37'·49N 6°24'·07W (ILNW 90/23)

#### 8 Fort William (2800.16)

Insert Lt Fl(2)G.8s2m2M in 56°48'·96N 5°07'·02W (ILNW 99/23)

#### 9 Gunna Sound (2800.20)

Insert *Obstn* depth 4.4m plus assoc lgd ODAS centred on 56°33'·44N 6°43'·10W (ILNW 188/23)

#### 10 Sound of Luig (2800.8 & 2800.10)

Amend sectors at Lt Fl.WRG.6s9m6/4M in 56°14'·77N 5°40'·18W to 002° - W - 012° - R - 030° - W - 201° - G - 002° (ILNW 191/23)

#### 11 Port Ellen (2800.3 Plan A)

Amend Lt desc. at G con Lt buoy Iso.G.2s to Fl.G.3s in 55°37'·63N 6°11'·34W (ILNW 200/23)

**12 Rubhan a Traighe, Craignish Point (2800.9)**

Insert wk sym with assoc lgd *Historic Wk* (see Note) in 56°07'·87N 5°36'·89W.

Add chart note:

**Historic Wrecks**

The sites of historic wrecks are protected from unauthorised interference (ILNW 278/23)

**13 Dubh Artach SW & Islay, Frenchman's Rocks W (2800.1) (correction amended see ILNW 109/24)**

Insert Y pillar Lt buoy:

Fl(5)Y.20s PA (2 buoys) in 56°05'·8N 6°46'·2W

Fl(5)Y.20s PA in 55°42'·1N 6°36'·8W (ILNW 289/23)

**14 Frenchman's Rocks W (2800.5)**

Insert Y pillar Lt buoy Fl(5)Y.20s in 55°41'·78N 6°36'·85W (ILNW 289/23)

**15 Corpach (2800.16 Plan D)**

Insert marina symbol in 56°50'·53N 5°07'·50W. Add assoc lgd *Corpach Marina*

Corpach Marina can be contacted via:

Tel: 07410 884902. VHF Ch 80. [www.corpachmarina.co.uk](http://www.corpachmarina.co.uk) (ILNW 362/23)

**16 Loch Leven (2800.16 Main chart & Plan B)**

Main chart

Insert YB S card pillar Lt buoy VQ(6)+LFl.10s in 56°41'·05N 5°08'·60W

Plan B

Insert Lgd (*buoyed channel*) within *Caolas nan Con* centred on 56°42'·32N 5°02'·85W (ILNW 375/23)

**17 Loch Eatharna (2800.20 Plan A)**

Replace depth:

0·9m with 0·2m in 56°37'·31N 6°31'·27W

1·6m with 1·0m in 56°37'·21N 6°30'·92W (ILNW 6/24)

**18 Frenchman's Rocks W (2800.1 & 2800.5)**

Insert racon symbol and assoc lgd A/S at Y pillar Lt buoy Fl(5)Y.20s in:

55°41'·78N 6°36'·85W (2800.1 & 2800.5)

56°05'·80N 6°46'·20W (2800.1) (ILNW 109/24)


**19 Brunerican Bay (2800.2)**

Replace depth 5·5m with 1·1m in 55°18'·33N 5°37'·71W

Insert depth 4·3m in 55°18'·22N 5°37'·40W. Delete depth 7·3m close SE (ILNW 143/24)

**20 Ross of Mull SW (2800.21)**

Insert lgd *Scientific Instruments* in 56°10'·15N 6°27'·87W (ILNW 172/24)

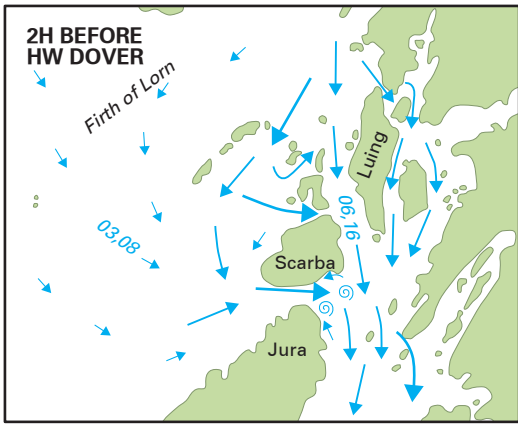

Block correction for 2800 Tidal streams  
around the north of Jura  
ILNW 184/22