

Imray Correction Notice

IC2800-3

4 December 2024

Chart 2800

WGS 84

Edition 2021

Versions available:

New Edition (corrected to November 2021)

NOTES

Below is a complete list of corrections issued since the 2021 edition of this chart was published.

Each correction is issued with an ILNW reference number and year.

Corrections are listed chronologically in ascending order.

1 Loch Creran (2800.15 Main chart & Plan A)

Insert depth:

3·3m in 56°31'·79N 5°19'·38W. Del depth 5·2m close SE (Main chart)

3·2m in 56°33'·10N 5°16'·15W (Plan A) (ILNW 144/22)

2 Campbeltown Loch (2800.2 Plan A)

Insert depth:

0·8m in 55°25'·88N 5°33'·60W

Replace depth:

2·6m with 2·1m in 55°24'·91N 5°35'·04W

2·5m with 1·7m in 55°26'·32N 5°33'·03W. Extend 2m contour E to enclose

Delete *obstr* 8·5m in 55°25'·59N 5°35'·64W (ILNW 177/22)

3 Tidal streams around the north of Jura (*certain copies*)

Insert block correction tidal stream diagram around Jura 2H Before HW Dover replacing the duplicate 1H Before HW Dover diagram (ILNW 184/22)

4 Loch Creran (2800.15)

Insert Lt Fl(2)G.6s2M at end of pontoon in 56°31'·27N 5°23'·88W (ILNW 243/22)

5 Loch Eatharna (Arinagour) (2800.20 Plan A)

Insert Y special Bn in 56°37'·31N 6°31'·40W (ILNW 362/22)

6 Port Ellen (2800.3 Plan A)

Insert depth:

1·7m in 55°37'·82N 6°12'·44W. Del 2·2m close NE

0·8m in 55°37'·84N 6°11'·56W. Del 1·5m close NE

2·1m in 55°37'·75N 6°11'·79W (ILNW 485/22)

7 Coll E (2800.1, 2800.19 & 2800.20)

Delete Y spar Lt buoy Fl(5)Y.20s in 56°37'·49N 6°24'·07W (ILNW 90/23)

8 Fort William (2800.16)

Insert Lt Fl(2)G.8s2m2M in 56°48'·96N 5°07'·02W (ILNW 99/23)

9 Gunna Sound (2800.20)

Insert Obstrn depth 4·4m plus assoc lgd ODAS centred on 56°33'·44N 6°43'·10W (ILNW 188/23)

10 Sound of Luing (2800.8 & 2800.10)

Amend sectors at Lt Fl.WRG.6s9m6/4M in 56°14'·77N 5°40'·18W to 002° - W - 012° - R - 030° - W - 201° - G - 002° (ILNW 191/23)

11 Port Ellen (2800.3 Plan A)

Amend Lt desc. at G con Lt buoy Iso.G.2s to Fl.G.3s in 55°37'·63N 6°11'·34W (ILNW 200/23)

12 Rubhan a Traighe, Craignish Point (2800.9)

Insert wk sym with assoc lgd *Historic Wk* (see Note) in 56°07'·87N 5°36'·89W.

Add chart note:

Historic Wrecks

The sites of historic wrecks are protected from unauthorised interference (ILNW 278/23)

13 Dubh Artach SW & Islay, Frenchman's Rocks W (2800.1) (correction amended see ILNW 109/24)

Insert Y pillar Lt buoy:

Fl(5)Y.20s PA (2 buoys) in 56°05'·8N 6°46'·2W

Fl(5)Y.20s PA in 55°42'·1N 6°36'·8W (ILNW 289/23)

14 Frenchman's Rocks W (2800.5) (correction amended see ILNW 109/24)

Insert Y pillar Lt buoy Fl(5)Y.20s in 55°41'·78N 6°36'·85W (ILNW 289/23)

15 Corpach (2800.16 Plan D)

Insert marina symbol in 56°50'·53N 5°07'·50W. Add assoc lgd *Corpach Marina*

Corpach Marina can be contacted via:

Tel: 07410 884902. VHF Ch 80. www.corpachmarina.co.uk (ILNW 362/23)

16 Loch Leven (2800.16 Main chart & Plan B)

Main chart

Insert YB S card pillar Lt buoy VQ(6)+LFl.10s in 56°41'·05N 5°08'·60W

Plan B

Insert Lgd (*buoyed channel*) within *Caolas nan Con* centred on 56°42'·32N 5°02'·85W (ILNW 375/23)

17 Loch Eatharna (2800.20 Plan A)

Replace depth:

0·9m with 0·2m in 56°37'·31N 6°31'·27W

1·6m with 1·0m in 56°37'·21N 6°30'·92W (ILNW 6/24)

18 Frenchman's Rocks W (2800.1 & 2800.5) (correction amended see ILNW 368/24)

Insert racon symbol and assoc lgd AIS at Y pillar Lt buoy Fl(5)Y.20s in:

55°41'·78N 6°36'·85W (2800.1 & 2800.5)

56°05'·80N 6°46'·20W (2800.1) (ILNW 109/24)

19 Brunerican Bay (2800.2)

Replace depth 5·5m with 1·1m in 55°18'·33N 5°37'·71W

Insert depth 4·3m in 55°18'·22N 5°37'·40W. Delete depth 7·3m close SE (ILNW 143/24)

20 Ross of Mull SW (2800.21)

Insert lgd *Scientific Instruments* in 56°10'·15N 6°27'·87W (ILNW 172/24)

21 Dubh Artach SW & Frenchman's Rocks W (2800.1)

Delete legend (2 buoys) from Y pillar Lt buoy Fl(5)Y.20s PA in 56°05'·8N 6°46'·2W

Delete Y pillar Lt buoy Fl(5)Y.20s PA plus assoc. racon sym. and lgd AIS in 55°42'·1N 6°36'·8W (ILNW 368/24)

22 Frenchman's Rocks W (2800.5)

Delete Y pillar Lt buoy Fl(5)Y.20s plus assoc. racon sym. and lgd AIS in 55°41'·78N 6°36'·85W (ILNW 368/24)

23 Loch Na Keal (2800.19)

Navigate with caution in the area between Gallie Rocks and Scarisdale Point, around 56°28'·30N 6°02'·20W. Depths significantly less than charted have been reported in this area. (ILNW 392/24)

24 Sound of Iona (2800.21)

Delete bns:

RW in 56°19'·73N 6°23'·83W

RW in 56°19'·70N 6°23'·63W


Y in 56°19'·54N 6°22'·05W (ILNW 418/24)

25 Sheep Island, Henrietta Reef E (2800.2 Plan C)

Insert depth 9·6 m, enclosed by 10m contour, in 55°17'·60N 5°33'·76W. Delete depth 11m close W. (ILNW 601/24)

26 Sanda Island E (2800.2 Main chart & Plan C)

Replace depth 8·7m with depth 5·6m in 55°16'·96N 5°32'·66W (ILNW 602/24)

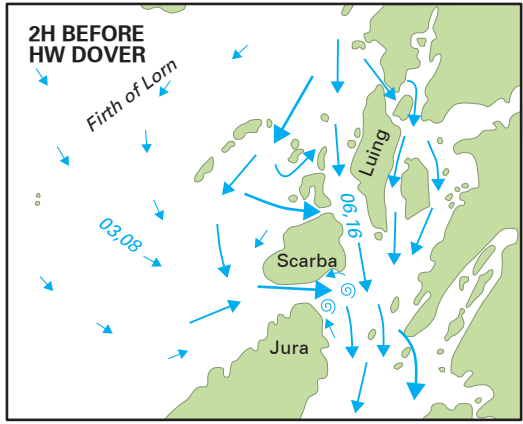

Block correction for 2800 Tidal streams
around the north of Jura
ILNW 184/22